




● **Type and meaning**

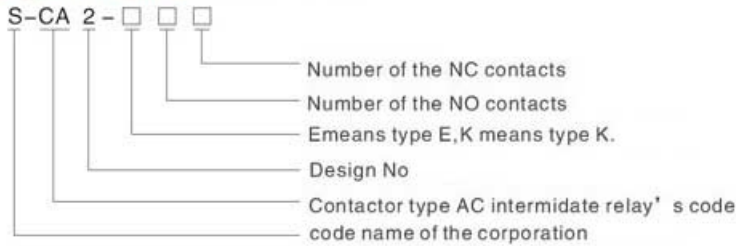

● **Features**

The products use forced friction structure with the function of self-cleaning contact. Add auxiliary contact group and air time-delay head at the top to form time-delay relay (except type E and type K). The series can use nails and card-rail of standard 35mm to install.


● **Application**

S-CA2 series AC intermediate relay is used in the controlled circuit of AC 50Hz of 60Hz. voltage up to 660v, and can be used for center-enlarging isolation of passing to the related controlled element.

● **Specifications**

Items	Type	S-CA2-40	S-CA2-31	S-CA2-22
rated insulating voltage		660		
given test current		10		
Rated working current		6		
Electrical life-span(time)		100		
mechanical life-span(time)		1000		
NC/NO shifting time		1.5ms		
the highest operating frequency		2/S		

● **Outline & mounting size**

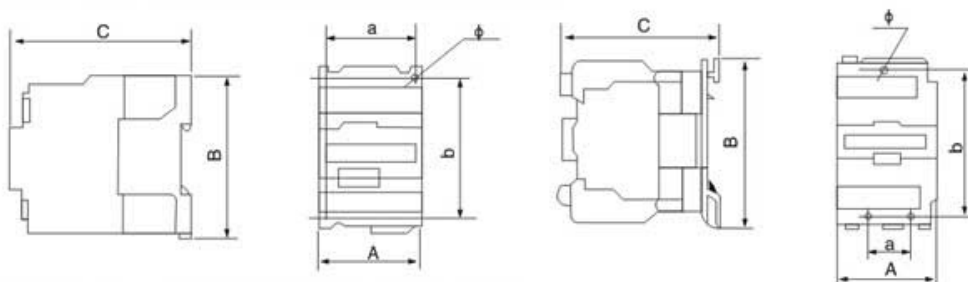

Type S-CA2-E can consult series S-LC1-E AC contactor 09 ' s outline installing dimension

Type S-CA2-K can consult series S-LC1-K AC contactor 09 ' s outline installing dimension

Type S-CA2-Z can consult series S-LC1-Z DC Operating contactor 09 ' s outline installing dimension