


Rotation Rectifiers

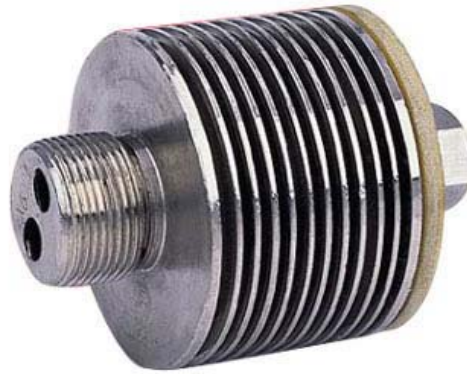

Comparison:

- It can be worked under greater centrifugal force

Typical applications

- Special used for rotation excitation dynamotor (electromotor)

Technical parameter:

Model	$I_{T(RMS)}$ A	V_{FM} V	V_{RRM} V	I_{RRM} mA	I_{FSM} mA	T_{jm} mA	R_{jC} °C/w	bear acentric accealeation	
								Normal g	super speed g
ZX40	40	≤1.35	100-1600	≤3	0.40	150	0.80	1250	2500
ZX100	100	≤1.6	100-2800	≤7	≤1.5	150	0.80	1250	2500
ZX200	200	≤1.6	100-2800	≤14	≤3.0	150	0.80	1250	2500
ZX300	300	≤1.6	100-2800	≤21	≤4.5	150	0.80	1250	2500
ZX500	500	≤1.6	100-2800	≤35	≤7.5	150	0.80	5000	5500

Outline Dimension:

